
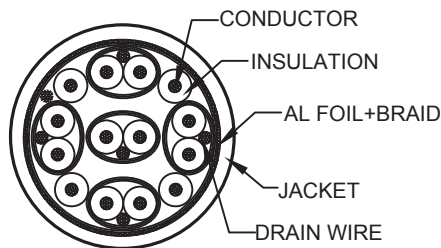


NOTES:

Electrical properties:


1. 100% open and short test.
2. Pass Quantum data 780E hand hold test instrument for HDMI1.4B.
3. Pass 4K*2K/30Hz PC test.
4. Support resolution up to 4K*2K/30Hz 4:4:4 or RGB.
5. IC: LT9721, passive.

ROHS 2.0 and REACH compliant.




MATERIAL LIST

⑨	PACKAGE	PE ZIP BAG+BARCODE STICKER	1
⑧	CABLE	USB POWER CABLE, BLACK	0.3M
⑦	CABLE	(1/0.18BC*1P+1/0.184BC+AM)*5C+1/0.20BC*5C+AM+1/0.18BC+64/0.12ALMG+PVC, OD: 5.0±0.2MM, COLOR: BLACK	0.3M
⑥	OUTER MOLD	BLACK PVC	1
⑤	OUTER MOLD	BLACK PVC	1
④	OUTER MOLD	BLACK ABS	1
③	CONNECTOR	USB A MALE, GOLD PLATED PIN ,GOLD PLATED SHELL	1
②	CONNECTOR	DP1.2 FEMALE, GOLD PLATED PIN ,GOLD PLATED SHELL	1
①	CONNECTOR	HDMI A MALE, GOLD PLATED PIN ,GOLD PLATED SHELL	1
No.	PART NAME	DESCRIPTION	QTY

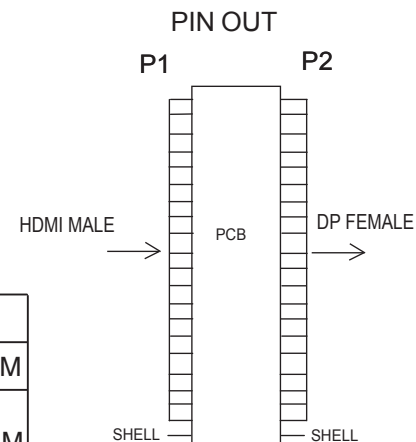

PACKAGE DRAW

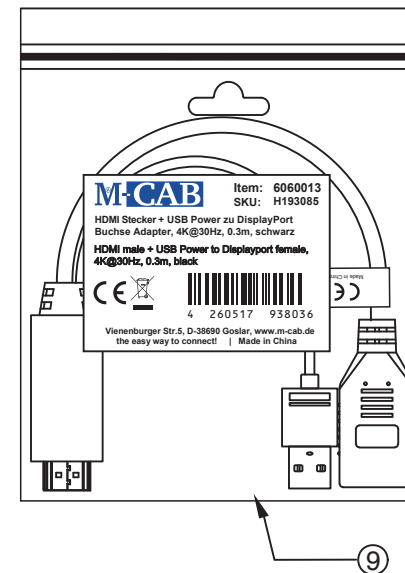

DRAW No.	NAME	HDMI/M+USB POWER to DP/F CABLE	
CUSTOMER	M-CAB	MAPE	TOLERANCE
MODEL No.	6060013		X. ±1.00 X.X ±0.50
APPROVE BY	CHECK BY	DRAW BY	SCALE
			MM
			PAGE
			1/1