


Cable Flag
Size: 70*15mm




NOTES:


- Electrical properties:
- 100% open and short test.
 - Pass Quantum data 780E hand hold test instrument for DP1.2 (21.6G).
 - Pass 3840*2160/60Hz with RGB and YUV444 PC test.
 - Pass DDC, (EDID), +5V, hot plug.
- ROHS 2.0 and REACH compliant.

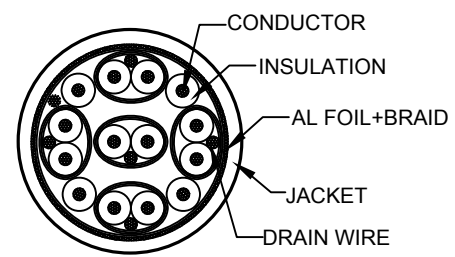

PIN OUT

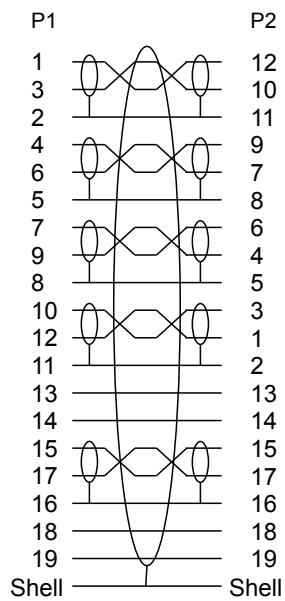

PACKING DRAW

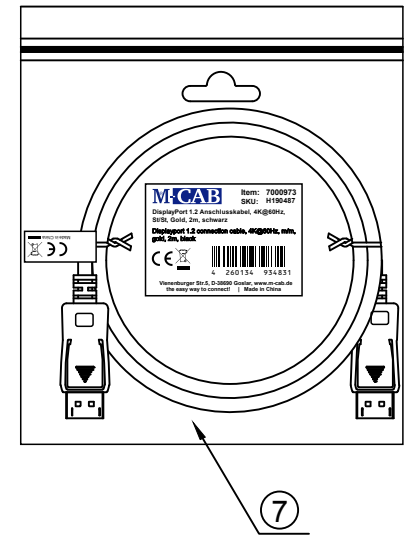

MATERIAL LIST

⑦	PACKAGE	PE ZIP BAG+BARCODE STICKER	1
⑥	PRINTING	High Speed Cable 20276 80 °C 30V VW-1	
⑤	CABLE	(1/0.254BC*1P+1/0.254BC+AM)*5C+1/0.254BC*4C+AM+1/0.254BC+128/0.12ALMG+PVC, OD: 6.0±0.2MM, COLOR: BLACK	2M
④	OUTER MOLD	BLACK ABS	1
③	OUTER MOLD	BLACK ABS	1
②	CONNECTOR	DP1.2 MALE, GOLD PLATED PIN, GOLD PLATED SHELL	1
①	CONNECTOR	DP1.2 MALE, GOLD PLATED PIN, GOLD PLATED SHELL	1
No.	PART NAME	DESCRIPTION	QTY

DRAW No.	NAME	DP1.2 CABLE, 30AWG		
CUSTOMER	M-CAB	MAPE	TOLERANCE	
MODEL No.	700973		X. ±1.00	X.X ±0.50
APPROVE BY	CHECK BY	DRAW BY	SCALE	MM
			PAGE	1/1