



Mini Patchpanel 8xRJ45, 1U CAT.6A STP gray

10Gbit, 500Hz, 10 inch

EAN-Nr: 4260517936872

Art-Nr: 7200508

Sku:



Specification:

Article information

The high quality of the shielded Cat.6A RJ45 mini patch panel ensures excellent performance for 10 Gigabit Ethernet applications. In addition, the mini patch panel is characterized by its versatile mounting options. It is suitable for installation in a 10 inch plane, for attachment to the wall or in conjunction with the DIN rail clamp set for DIN rail mounting.

10 inch mounting / wall mounting or DIN rail mounting possible, 1U

8 ports

LSA connection strip for installation cable AWG24..AWG22

Color code according to TIA / EIA 568 A / B

Lid with quick release

With earthing terminal

Scope of delivery:

8 cable ties, assembly instructions

4 screws (M6x16mm) and nut

Product features

Category: 6A (TIA)

Transmission: 10 Gbit

Bandwidth: 500 MHz

Number of height units: 1

Connection type: LSA

Type of connector: RJ45 8(8)

Screened: True

Cross section: AWG 24 - AWG 22

Colour code: acc. TIA/EIA 568A/B


Complaint to UL94: V-0

Housing material Panel: Steel, 1.5mm

Housing material of RJ45 jacks: PBT

Housing material LSA-terminal: PC

Material LSA contacts: Phosphor bronze, tinned

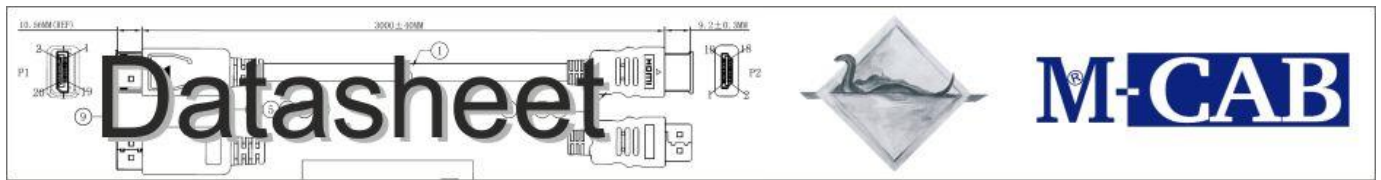

Insertion force: 50 N

Durability LSA contacts: 200

Mating cycles RJ45 jack: 750

Height: 44.0 mm

Width: 254.6 mm

Depth: 108.0 mm

Temperature range (Storage): -40 – 70 °C

Temperature range (Operation): -10 – 60 °C

Electrical strength: 125 V AC RMS

Dielectric Withstanding Voltage: 750 V AC 60Hz

Current Rating: 1,5 A

Insulation Resistance: 1000 MOhm

Contact Resistance: 100 mOhm