



Connection Module CAT.6A 10Gbit

CLASS EA - shielded

EAN-Nr: 4260517932430

Art-Nr: 7200292

Sku: H192751



Specification:

Article information

The Class EA connection module provides high performance for 10 Gbit/s at small required space, combined with easy assembling without the need of special tools. Universal possibilities of mounting through screwing, linking.

Optional 19 inch panel of up to 24 x modules provides multiple field of applications:

Connection of installation cable, e.g. in canals or ducts.

Connection of installation cable with patch cable for end-to-end links or consolidation point applications.

Features:

Fully shielded zinc diecast bodyhousing

Dimension (W x H x L) 18 x 26 x 39 mm

Link performance 10 Gbit/s Class EA acc. to ISO 11801

2 x compact cable manager for AWG26/1..AWG22/1 and AWG26/7..AWG24/7

Max. cable diameter: 8,5mm

Pair management with colour code, printed on cable manager

Reliable differentiation of cable managers by mechanical and colour assignment (plastic black / white) on the cable coupler and on cable managers

PoE and PoE Plus according to IEEE802.3af/at

360° shield contact and strain relief independent from each other

Gliding stored shield contact

Screw- and line-up through loops at the side of the module

19" panel for holding of 24 x modules available as accessory

Included in delivery:

1 x connection module,

2 x cable pre-sorter (black + white),


2 x copper foil,

2 x cable ties

Product features

1/1

Specifications are subject to change without prior notice.
All tradenames referenced are registered namework of their respective owners

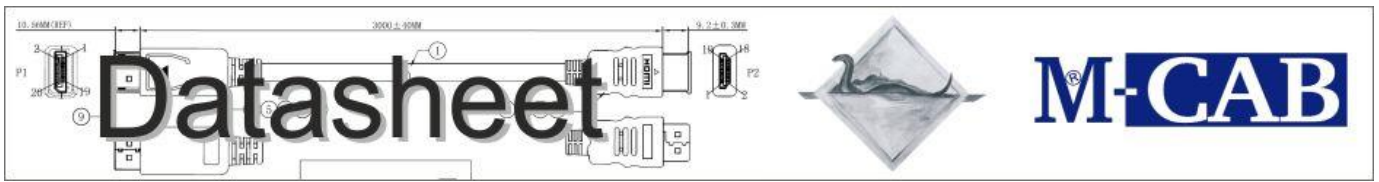

Category: 6A (TIA)

Connection type: LSA

Screened: True

AWG-range for litz wire conductor: 26 – 24

AWG-range for solid core: 26 – 22

Special tool necessary: False

Suitable for round cable: True

Suitable for flat cable: False

Suitable for litz wire conductor: True

Suitable for solid core: True